

## 90-13M

### AWS/ASME SFA-5.9 0000 00000 ERNiCu7

:000000 0 0000

-0000 00000000 00000000 0 00-0000 00000000 0000 000 0 000000 0000 00/000 000 000 000  
0 00 00 0000 000 0000000000 000000 000000 0000 0000000 .0000000000000000 0000000 000 00 00  
.00000000 000000 00-0000 0000000000 00 00000 0000 0000000000

000 000000 0000 0000000 00 0000 0000 00 00000 0000000 0000000 0000000 00000 0000000000 00  
.00000000 0000000 0 00000000 00000000 00 000000 0000 0 0000000 00000

0 0000000 000000000 0000000000 000000 00 00000000 0000 00000000 00000 00 0000000 0000000000  
.00000000 00000 000000000

7-ERCuNi 000 000 000

Written by Administrator  
 Sunday, 04 November 2018 17:18 -

:000 000 00000000 00000000

	C	Mn	Si	Ti	Ni	Cu
Fe	0.5	3.7	0.1	2.3	base	28
	0.9					

:00000 000

(0000 100 00000) DIN EN 439-I1

000000 00000 DIN EN 439-M11( 0-5%CO<sub>2</sub>

:0000 000 000 00000000 0000

0000 00000000	00000000 000000.2%	000 0000000	ISO-V 00 0000000 0000(j)
(N/mm <sup>2</sup> )	(N/mm <sup>2</sup> )	Lo=4d(%)	25°C
>500	>300	>35	>150

Written by Administrator


Sunday, 04 November 2018 17:18 -

---

Written by Administrator

Sunday, 04 November 2018 17:18 -

---

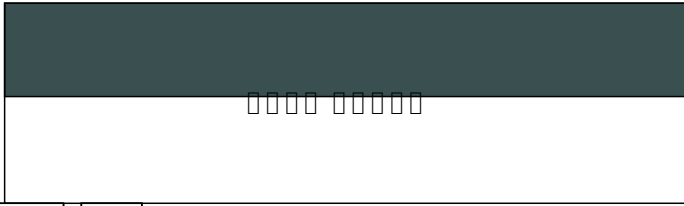

<b>NiCu</b>	□□
<b>30Fe</b>	□□
<b>(2.43</b>	□□
<b>60);</b>	□
<b>NiCu</b>	□□
<b>30Al</b>	□□
<b>(2.43</b>	□
<b>75)</b>	:
<b>Alloy</b>	
<b>400,</b>	
<b>AST</b>	
<b>M B</b>	
<b>127,</b>	
<b>B</b>	
<b>165</b>	

Written by Administrator

Sunday, 04 November 2018 17:18 -

---

Written by Administrator

Sunday, 04 November 2018 17:18 -

---





□□□□□ :



0000000 00 00000000 15 0000 00 00000000 0000 000000 0000 0000 0000 0 000000 0000 1.6 0000

0.8.□□□□□□□□



Written by Administrator

Sunday, 04 November 2018 17:18 -

---

0000 : 0000 00 0000 000000 000000 00 0000 0 0000000000 000000 00 0000000 0 0000 0000





Written by Administrator

Sunday, 04 November 2018 17:18 -

---

Written by Administrator

Sunday, 04 November 2018 17:18 -

---

